Pillar Panel (ABS/AES)

Set up Guide


EXCLUSIVE ZEUS

■ This product is made of ABS/AES

This guide explains how to install the M'z SPEED product on the vehicle. For safe and proper installation, please read this guide carefully before starting the work.

Fig. 1 Product Surface Double-Sided Tape Application Area

← : Indicates the front side of the vehicle (front direction).

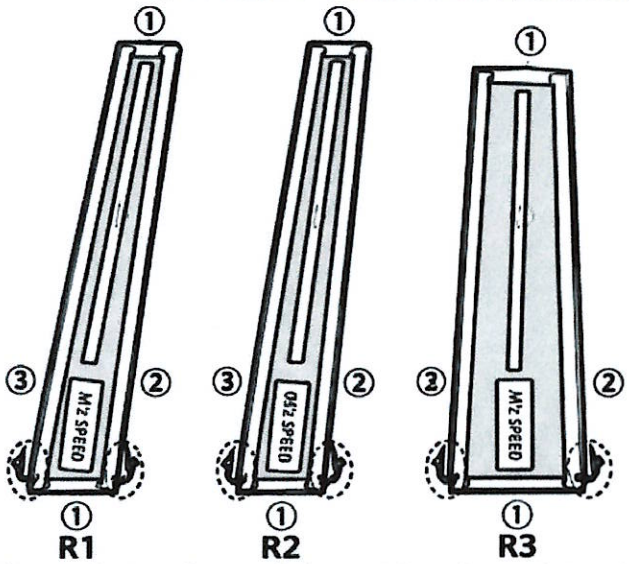

The product surface and the positions for applying the double-sided tape are shown in the figure above.

Included Parts List	No.	Part Name	Quantity
	1	Pillar Panel (L/R 3-pc Set)	1 Set
	2	Cleaner Set	1


■ Installation Procedure ■

1. Referring to Figure 1, thoroughly degrease the back of the product (the side with the product name label). Then, attach the included item 'a' as shown in the diagram, positioning it approximately 1 mm inward from the edge of the product.
2. Referring to Figure 2, temporarily fit the product to the vehicle, confirm the attachment position, mark the vehicle side with masking tape or similar, and thoroughly degrease the vehicle's attachment surface.
3. First, peel off the release paper ① from the double-sided tape that was attached in step 1, then peel off a small portion of the release paper on the bottom of ② and fold it back towards the surface.
4. Align the label with the markings you made earlier, and carefully peel off the release paper ② that you folded over to the surface side, making sure not to tear it. Then, press it firmly onto the product.
5. Attach the included part b to your desired location. (Thoroughly degrease the application area, cut out the desired logo, peel off the backing paper, and attach it. Rub firmly over the application sheet, then slowly peel off the application sheet. Finally, gently press down on the attached logo to ensure it adheres well.)

*The edges of this product have been chamfered, but please handle with care.

*For vehicles equipped with visors, removal and reinstallation of the visors will be required before installing this product. (Please provide your own double-sided tape or similar for visor attachment.)

Fig. 2

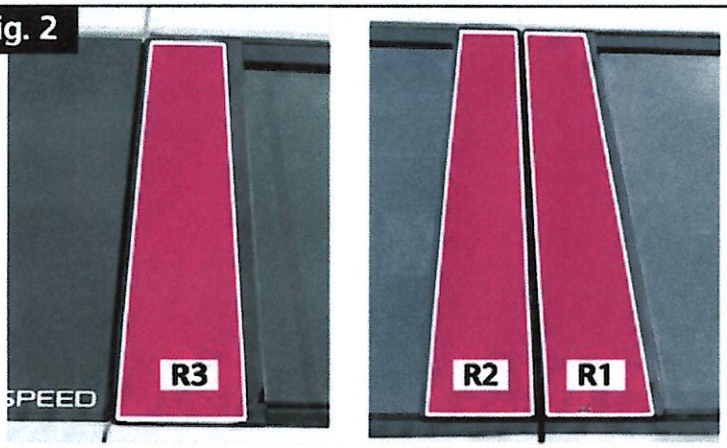

If the genuine pillar line is not clearly visible, it will look better if the position is slightly lower than shown.

Align R1 and R2 in parallel for a cleaner appearance and better fit.

About the Double-Sided Tape

The double-sided tape used for this product is an industrial product with high adhesion.
It has very strong bonding strength, so be sure to apply it in the correct position. Once the double-sided tape is adhered, it will be difficult to remove, so please check the position carefully and install with care.

■ Cautions

- After opening the package, please check that all accessories are included and that there is no damage.
- This product is made of ABS/AES resin. Do not apply excessive force, as it may cause damage. Also, please avoid installing this product in extremely low temperatures, as it may become more susceptible to damage.
- Due to differences between vehicles and individual products, some adjustments may be necessary during installation. Please be sure to check the fitment before installation. (Protect the vehicle and product with masking tape or other suitable materials to prevent scratches.)
- We are not responsible for any defects, damage, or accidents caused by improper installation or attachment of this product.
- Do not subject the product to impact or expose it to water (such as washing the vehicle) for 24 hours after installation.
- Returns are not accepted after installation. In addition, we cannot accept any claims resulting from installation errors due to the nature of this product.

M'z SPEED®
M'z SPEED Co., Ltd.
3-8-7 Shinkitajima, Higashiosaka City, Osaka 578-0966, Japan
Email : randi@mzspeed.co.jp
WA : +81 80-7675-5646