TESLA Model Y /YL
(YL1YT) (YL3YT)
2025/3 – 2026/7 ~
Front Half Spoiler

Setup Guide

EXCLUSIVE ZEUS

■ This product is made of ABS / AES.

■ This guide explains how to install the M'z SPEED product on the vehicle. For safe and proper installation, please read this guide carefully before starting the work.

Fig. 1 Rear view of product



Fig. 2

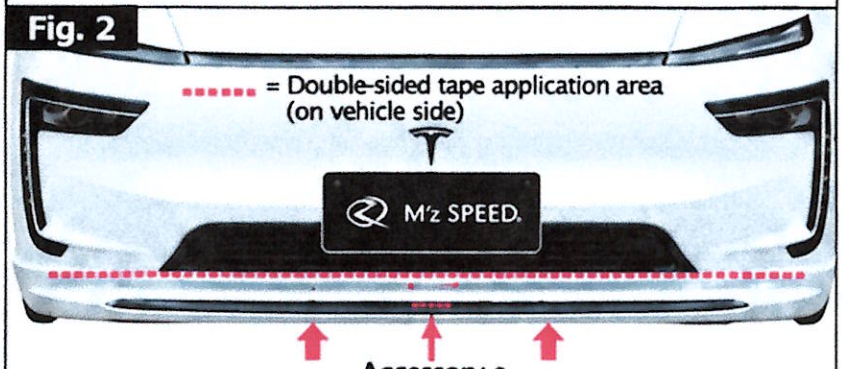


Fig. 2-a


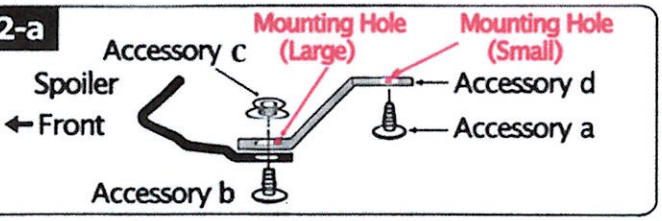


Fig. 3

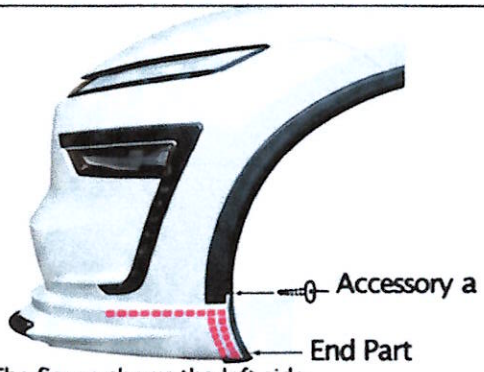

* The figure shows the left side.
Perform the same process on the right side.
= Double-sided tape application area (on vehicle side)

	No.	Part Name	Qty.
Included Parts	A	M4 × 12 Tapping Screw	4
	B	M6 × 15 Truss Bolt	2
	C	M6 Flange Nut	2
	D	Spacer (Z-type)	2
	E	Emblem	1
	F	3M™ Double-Sided Tape (3.0 mm)	1 roll
	G	3M™ PAC Primer K-500	2

Installation Procedure

1. Referring to Figures 1, 2, and 3, thoroughly degrease the areas on the product where the double-sided tape is to be applied, then use one of the included "G" items to apply the primer.
2. Attach the included part "F" (double-sided tape) to the locations indicated on the back of the product.
3. Temporarily fit the product to the vehicle and mark the mounting position with masking tape or a similar tool. Referring to Figure 2-a, temporarily attach the spoiler using the large mounting hole side, and then mark the vehicle using the small mounting hole.
4. Drill a 3.0 mm hole at the marked location.
5. Thoroughly degrease the vehicle's mounting surface, and apply one of the included "G" packets to the area where the double-sided tape will be applied.
6. Partially peel off the release paper from the double-sided tape attached to the part shown in Figure 1 (▬), fold it outward, and temporarily attach it to the vehicle. While checking the overall balance, peel off the remaining release paper and press it firmly into place. Refer to Figure 2-a to tighten each part, and secure it with the included part "a", from the small mounting hole "d" toward the vehicle.
7. Attach the end part shown in Figure 1 to the position shown in Figure 3, drill a 3.0 mm hole in the vehicle through the mounting hole, and secure it with the included part "a". (Same for both sides.)
8. Figure 2 shows the attached adhesive recess. Degrease it and then attach the emblem. part "e".

Regarding Primer

Caution: When using the primer, follow the instructions in the 3M™ PAC Primer K-500 Instruction manual. Standard drying conditions: Allow to dry completely at 23°C for 10 minutes to 3 hours, ensuring that dust, dirt, and water droplets do not adhere to the surface. If the temperature is below 15°C, use a heater to warm the surface. To prevent yellowing of the painted surface, wipe off any excess primer with alcohol or a similar product.

■ Cautions

※ After unpacking, please check that all accessories are present and undamaged.
※ This product is made of ABS / AES molded plastic. Applying excessive force may cause damage, so please do not do so. Please note that damage caused by such force will not be covered under warranty.
※ This product may require some modification due to vehicle and product tolerances, so please be sure to check the installation compatibility. Please protect the vehicle and product with tape to prevent scratches, etc.
※ Please be aware that we cannot accept any responsibility for malfunctions or accidents caused by improper processing, assembly, or misuse of this product.
※ After installing this product, do not subject it to impact or get it wet (e.g., car washing) for 24 hours.
※ The bolts and screws used to attach various parts may loosen over time, so please check them occasionally.
※ We cannot accept returns after installation.

■ Important Notes Before Painting

※ Always perform a fitting check before painting.
※ Due to the manufacturing process, burrs and voids may inevitably occur in the product. Please remove them during the painting and surface preparation stage.
※ Please be sure to use urethane-based paint specifically for dry resins. Also, please allow the painting may at room temperature. Heat drying may cause warping or deformation of the furtherwork. Please understand that we cannot accept any claims regarding the paintwork.
※ We cannot accept returns after painting or installation.

M'z SPEED®
M'z SPEED Co., Ltd.
3-8-7 Shinkitajima, Higashiosaka City, Osaka 578-0966, Japan
Email : randi@mzspeed.co.jp
WA : +81 80-7675-5646