TESLA Model Y
(YL1YT)
2025/3 -
Side Step

Set Up Guide

EXCLUSIVE ZEUS

■ **This product is made of ABS / AES.**

This guide explains how to install the M'z SPEED product on the vehicle. For safe and proper installation, please read this guide carefully before starting the work.

Installation Procedure


1. Refer to Fig. 1 and 2. Thoroughly degrease the areas where the double-sided tape will be applied to the product, and apply one of the included adhesive strips (d). Attach the adhesive strips to the areas shown in Fig. 1 (both sides).
2. Temporarily fit the product to the vehicle, mark the mounting holes shown in Fig. 2 on vehicle, and drill 3.0 mm holes.
3. Thoroughly degrease the area on the vehicle where the product will be attached, and apply the included adhesive (d) to the area where the double-sided tape will make contact. Peel off a small portion of the release paper from both ends of the double-sided tape attached to the back of the product, fold it outward to the front of the product, and temporarily secure the release paper with masking tape or similar.
4. Temporarily place the product on the vehicle, then slowly pull it out from the release paper in the center of the vehicle, and firmly press the double-sided tape onto the vehicle.
5. Refer to Sections 2-a and 2-b, insert the included accessories between the product and the vehicle, and assemble them in place using the included accessories.

Included Parts

No.	Part Name	Qty.
a	M4 × 16 Tapping Screw	8
b	3.0 mm Rubber Washer	8
c	3M™ Double-Sided Tape (3.0 mm)	2 rolls
d	3M™ PAC Primer K-500	2

Fig. 1 Rear View of Product

Front ▶

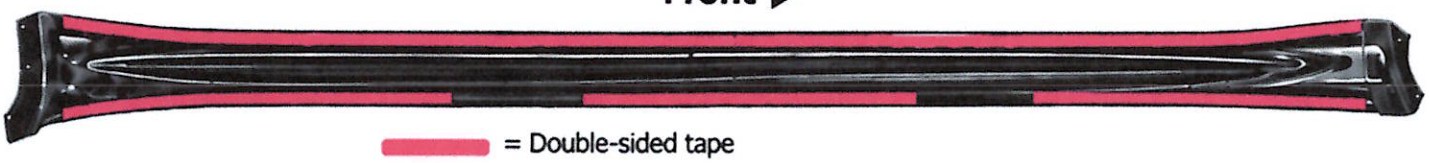

= Double-sided tape

Fig. 2

◀ Front



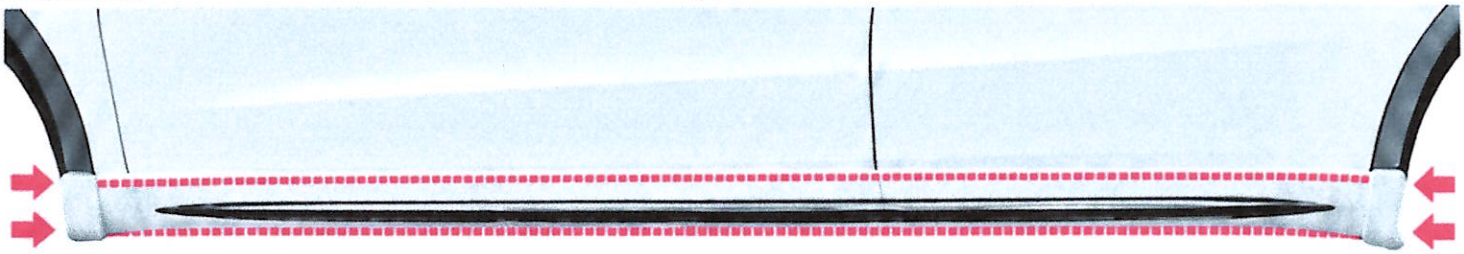


Fig. 2-a

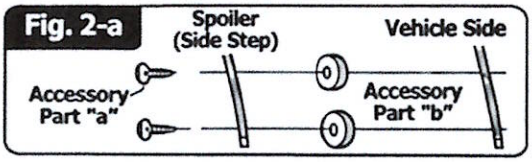

= Double-sided tape application area (on vehicle side)

Fig. 2-b

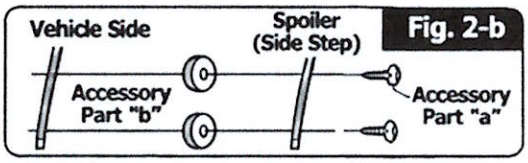

* The figure shows the left side. Perform the same process on the right side.

■ Cautions

※ After unpacking, please check that all accessories are present and undamaged.
※ This product is made of ABS / AES molded plastic. Applying excessive force may cause damage, so please do not do so. Please note that damage caused by such force will not be covered under warranty.
※ This product may require some modification due to vehicle and product tolerances, so please be sure to check the installation compatibility. Please protect the vehicle and product with tape to prevent scratches, etc.
※ Please be aware that we cannot accept any responsibility for malfunctions or accidents caused by improper processing, assembly, or misuse of this product.
※ After installing this product, do not subject it to impact or get it wet (e.g., car washing) for 24 hours.
※ The bolts and screws used to attach various parts may loosen over time, so please check them occasionally.
※ We cannot accept returns after installation.

■ Important Notes Before Painting

※ Always perform a fitting check before painting.
※ Due to the manufacturing process, burrs and voids may inevitably occur in the product. Please remove them during the painting and surface preparation stage.
※ Please be sure to use urethane-based paint specifically for dry resins. Also, please allow the painting at room temperature. Heat drying may cause warping or deformation of the product. Please be advised that we cannot accept any claims regarding the paintwork.
※ We cannot accept returns after painting or installation.

M'z SPEED
M'z SPEED Co., Ltd.
3-8-7 Shinkitajima, Higashiosaka City, Osaka 578-0966, Japan
Email : randi@mzspeed.co.jp
WA : +81 80-7675-5646