

ALPHARD
(GGH/AGH/AYH)
SC/S grade / Executive Lounge S
HYBRID SR/S grade /
HYBRID Executive Lounge S MC後
Front Harf Spoiler

SET UP GUIDE

1. Refer to figure 2 and figure 2-b and use the metal fittings on the back of the spoiler to secure accessory b. Bend the remaining net along the spoiler so that it does not interfere with the vehicle. Also, refer to Figure 2 in the attached sheet: Advice on using a sealer, and be sure to secure the net and spoiler in several places with the included accessories.
2. Install the LED daytime running lights in the position shown in Figure 2.
3. Refer to figure 1 and cut the genuine bumper where the LED daytime running lights and spoiler interfere. Assemble the spoiler temporarily to check that there is no interference. (Please do not cut the spoiler mounting surface).
4. Temporarily assemble the spoiler to the vehicle, and mark the parts shown in Figures 2 and 4 on the original bumper ● (make sure that using screws will not affect the surface of the spoiler), and drill 5.0 mm holes in the marked locations.
5. Remove the front bumper from the vehicle.
6. Temporarily assemble the spoiler to the front bumper, mark the spoiler through the hole you drilled in step 4, and drill a 3.2mm hole at the marked location.
7. Thoroughly degrease the front bumper and spoiler mounting area, and apply attached product c to the areas shown in Figures 2 and 4 ●●●●●
8. Please carefully read the attached sheet of advice on using the sealer before installing the spoiler to the front bumper.
9. For the parts shown in figures 2 and 4, ● secure the parts from the inside of the front bumper towards the spoiler using accessory A.
10. Place the front bumper back onto the vehicle.

List of included parts;	quantity
A: 4 x 12 tapping screw	4
B: Net (1200x80)mm.	1
C: Solar sealant	1
LED daylight	1 set



Please cut the genuine bumper at the part shown in the left image where the LED daytime running light and spoiler interfere. (Please do not cut the spoiler mounting surface).

図 2

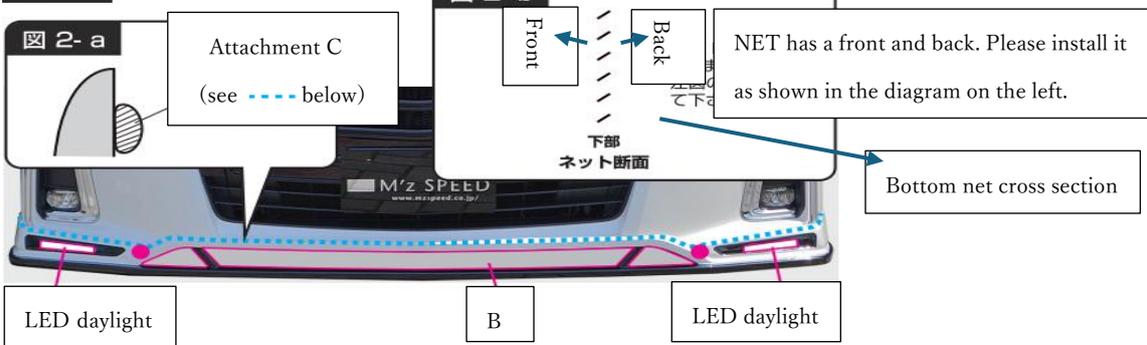


図 3



図 4

